

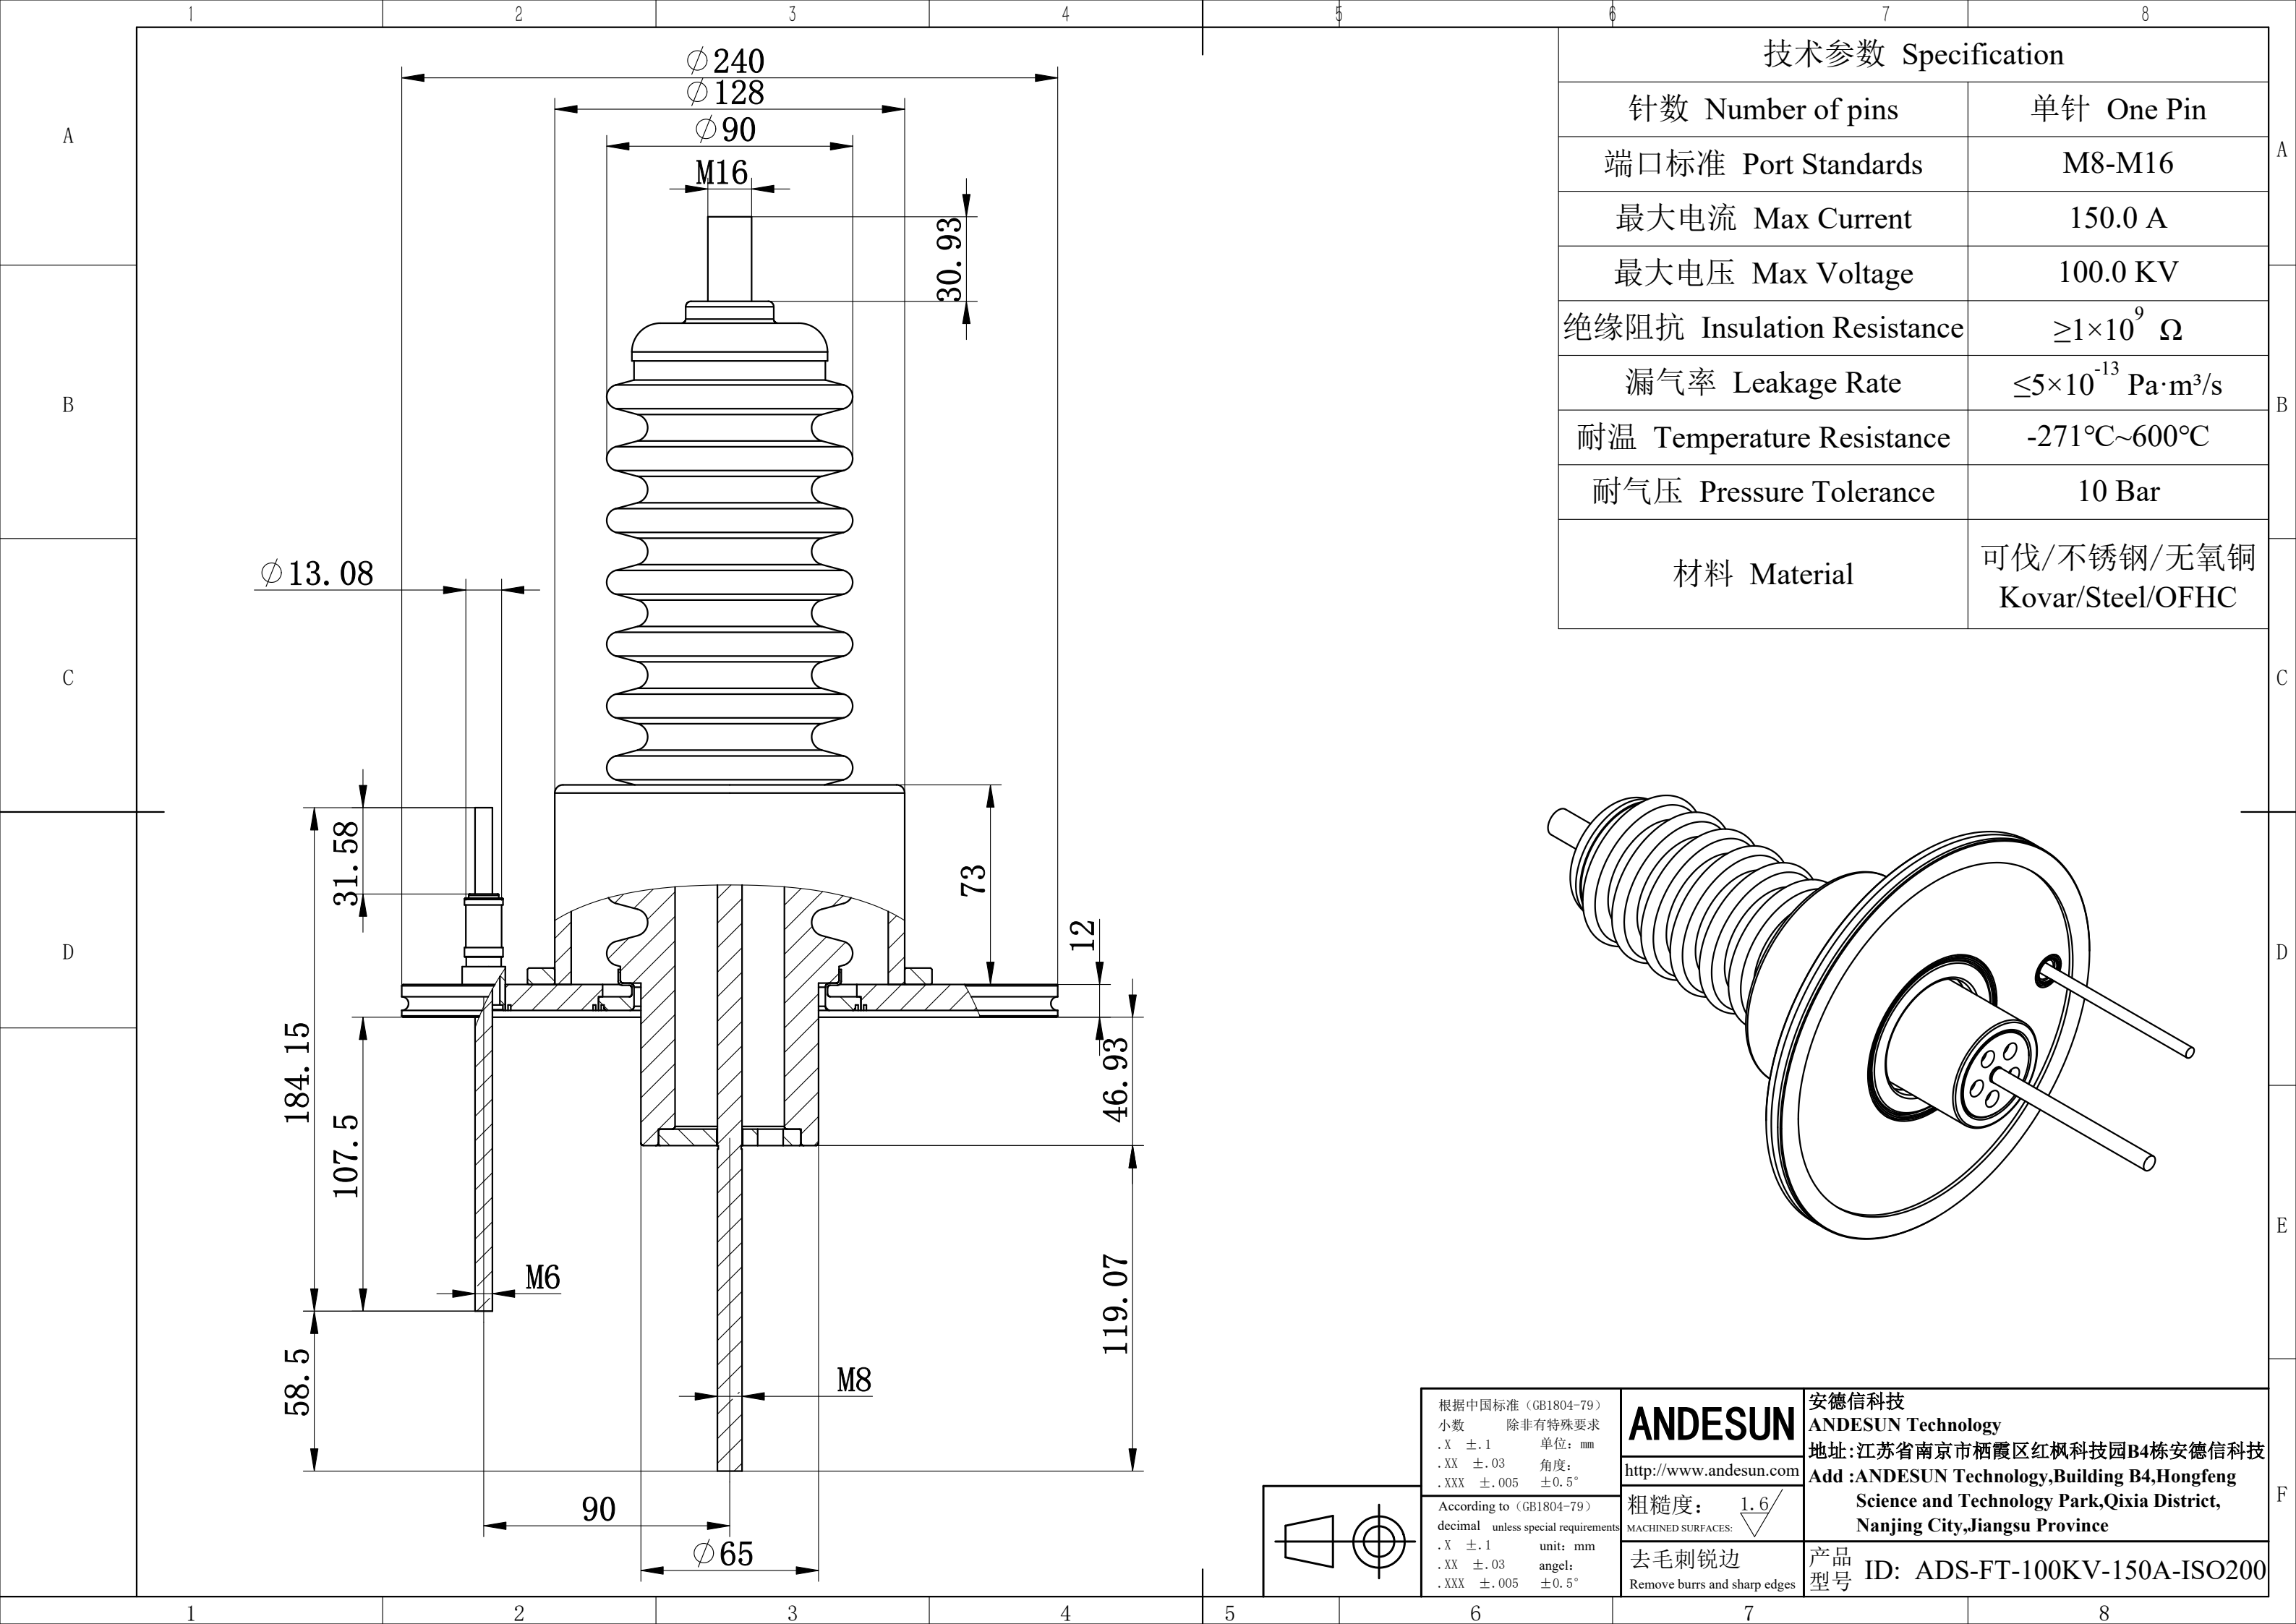




技术参数 Specification	
针数 Number of pins	单针 One Pin
端口标准 Port Standards	M8-M16
最大电流 Max Current	150.0 A
最大电压 Max Voltage	100.0 KV
绝缘阻抗 Insulation Resistance	$\geq 1 \times 10^9 \Omega$
漏气率 Leakage Rate	$\leq 5 \times 10^{-13} \text{ Pa} \cdot \text{m}^3/\text{s}$
耐温 Temperature Resistance	-271°C~600°C
耐气压 Pressure Tolerance	10 Bar
材料 Material	可伐/不锈钢/无氧铜 Kovar/Steel/OFHC

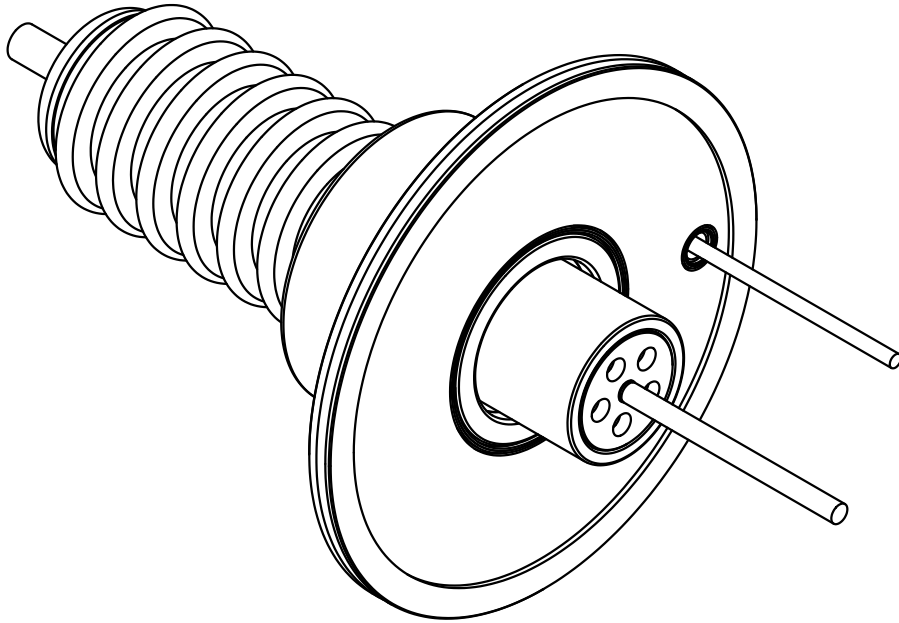

根据中国标准 (GB1804-79) 小数 除非有特殊要求 .X ±.1 单位: mm .XX ±.03 角度: .XXX ±.005 ±0.5°	ANDESUN	安德信科技 ANDESUN Technology
	http://www.andesun.com	地址:江苏省南京市栖霞区红枫科技园B4栋安德信科技
	粗糙度: $\frac{1.6}{\sqrt{R}}$ MACHINED SURFACES:	Add :ANDESUN Technology,Building B4,Hongfeng Science and Technology Park,Qixia District, Nanjing City,Jiangsu Province
去毛刺锐边 Remove burrs and sharp edges		产品 ID: ADS-FT-100KV-150A-ISO200 型号