


A



B

C

D

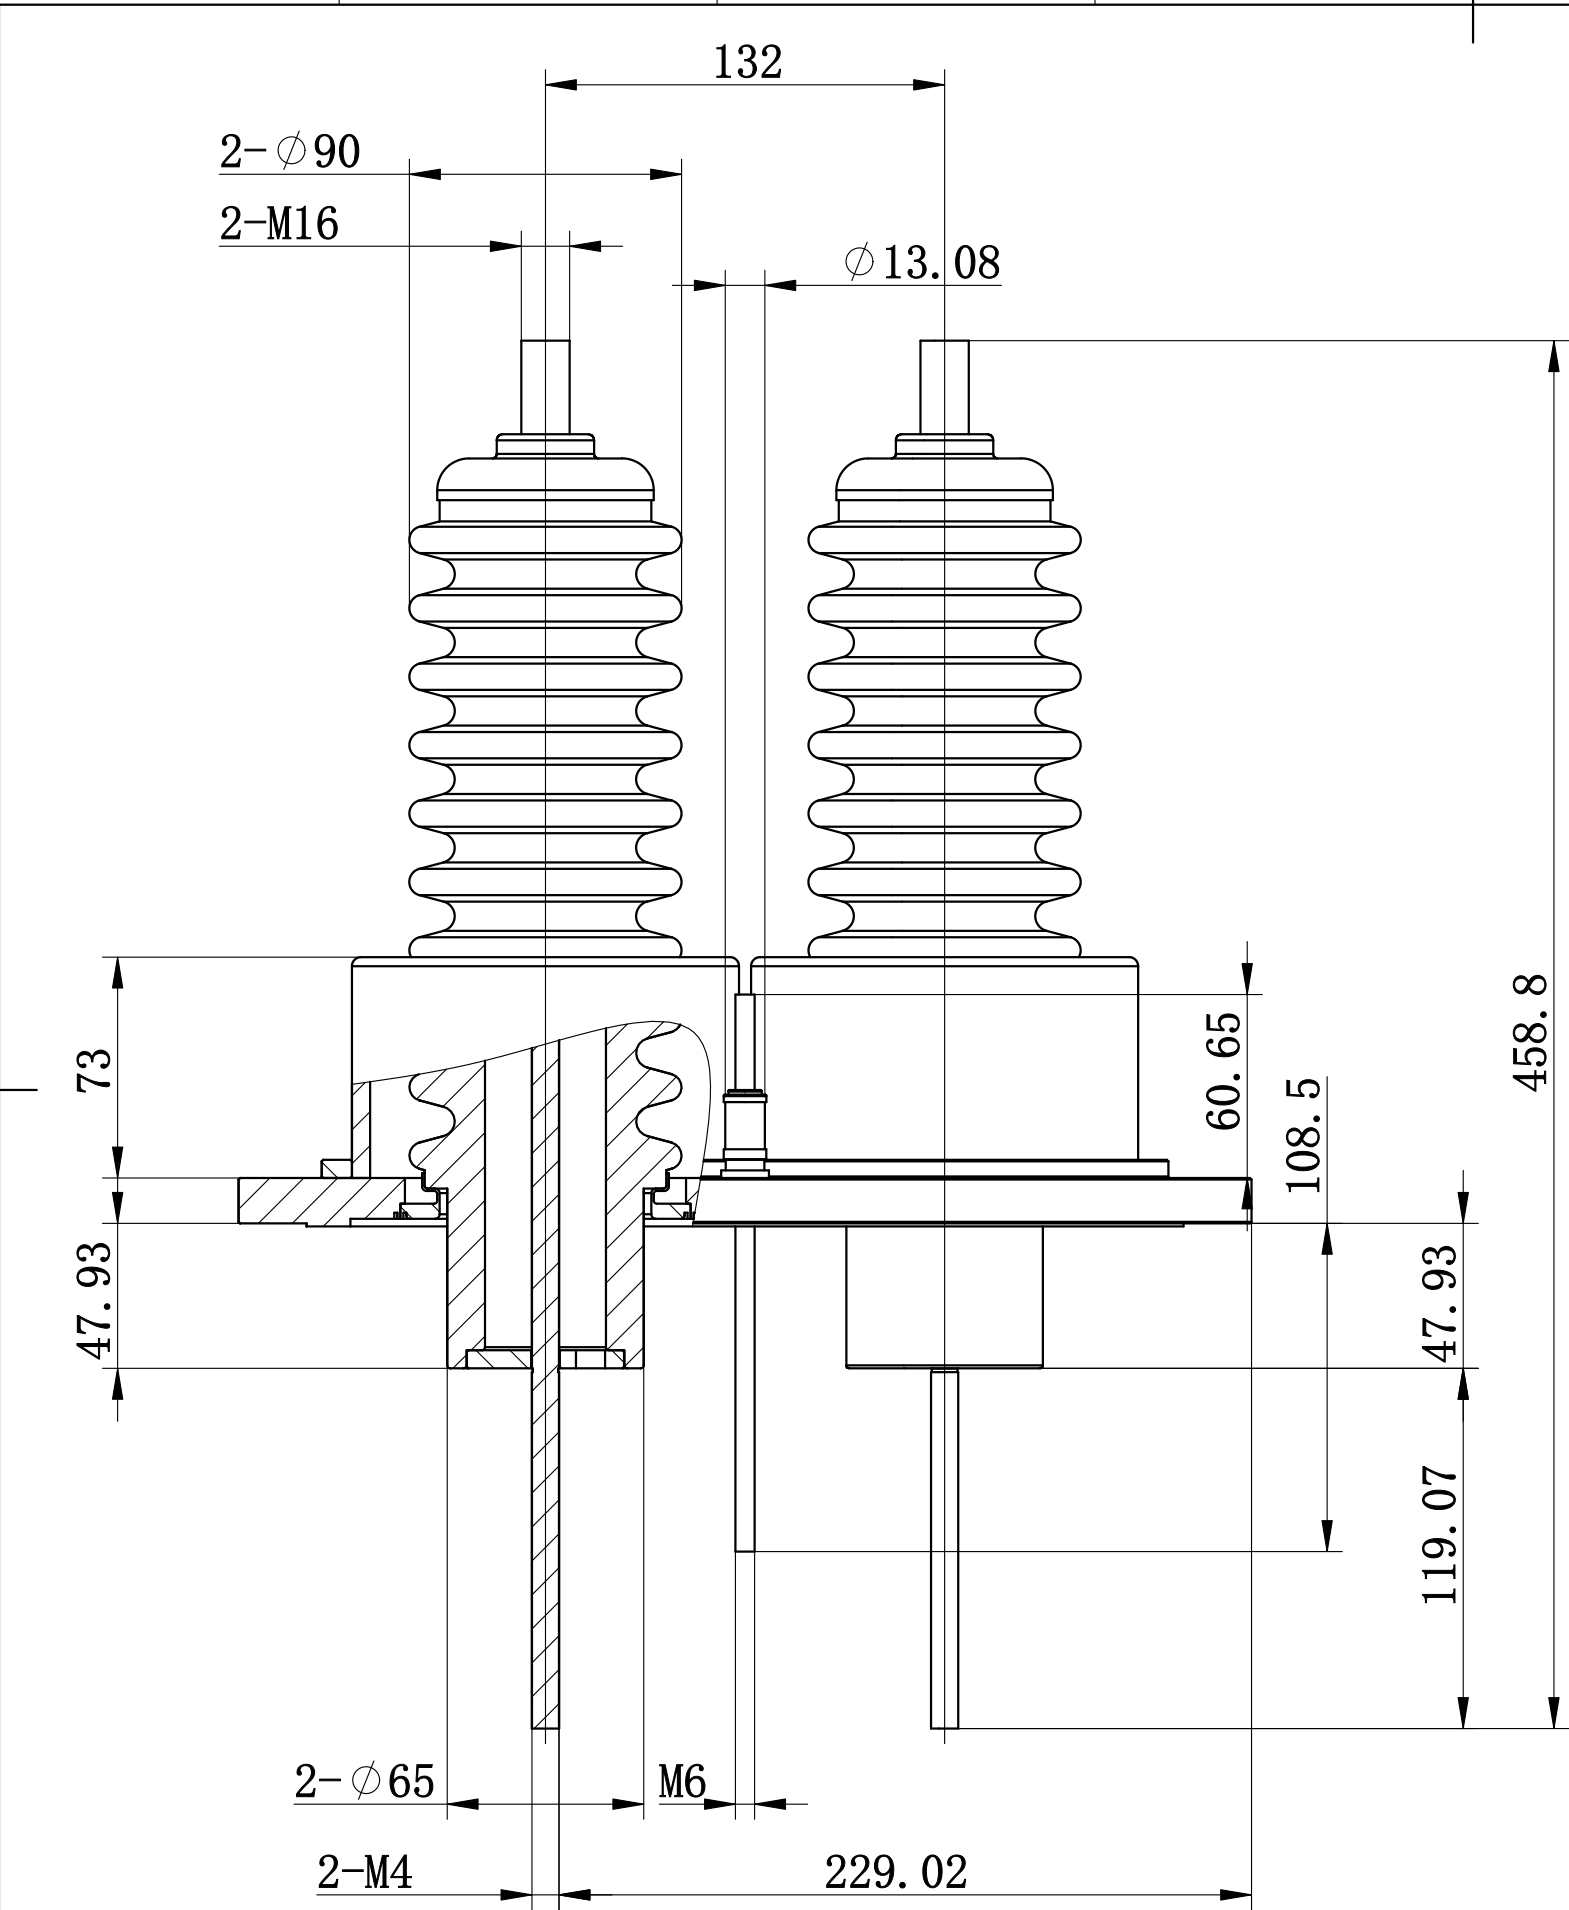

技术参数 Specification	
针数 Number of pins	双针 Two Pins
端口标准 Port Standards	M8-M16
最大电流 Max Current	2.0 A
最大电压 Max Voltage	100.0 KV
绝缘阻抗 Insulation Resistance	$\geq 1 \times 10^9 \Omega$
漏气率 Leakage Rate	$\leq 5 \times 10^{-13} \text{ Pa} \cdot \text{m}^3/\text{s}$
耐温 Temperature Resistance	-271°C~600°C
耐气压 Pressure Tolerance	10 Bar
材料 Material	可伐/不锈钢/无氧铜 Kovar/Steel/OFHC

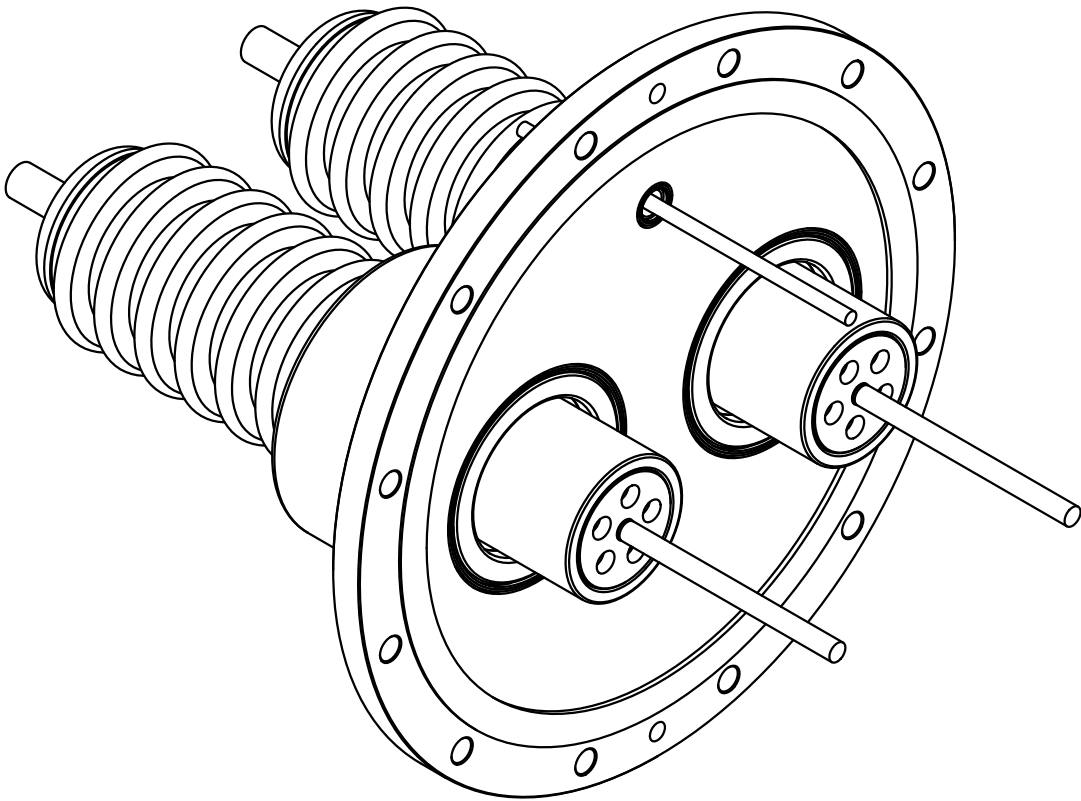

根据中国标准 (GB1804-79)
小数 除非有特殊要求
.X ± 1 单位: mm
.XX ± 0.03 角度:
.XXX ± 0.005 $\pm 0.5^\circ$
According to (GB1804-79)
decimal unless special requirements
.X ± 1 unit: mm
.XX ± 0.03 angel:
.XXX ± 0.005 $\pm 0.5^\circ$

ANDESUN
<http://www.andesun.com>
粗糙度: 1.6/
MACHINED SURFACES:
去毛刺锐边
Remove burrs and sharp edges

安德信科技
ANDESUN Technology
地址: 江苏省南京市栖霞区红枫科技园B4栋安德信科技
Add: ANDESUN Technology, Building B4, Hongfeng
Science and Technology Park, Qixia District,
Nanjing City, Jiangsu Province
产品
型号 ID: ADS-FT-100KV-2A-ISO200