


A

B



C

D

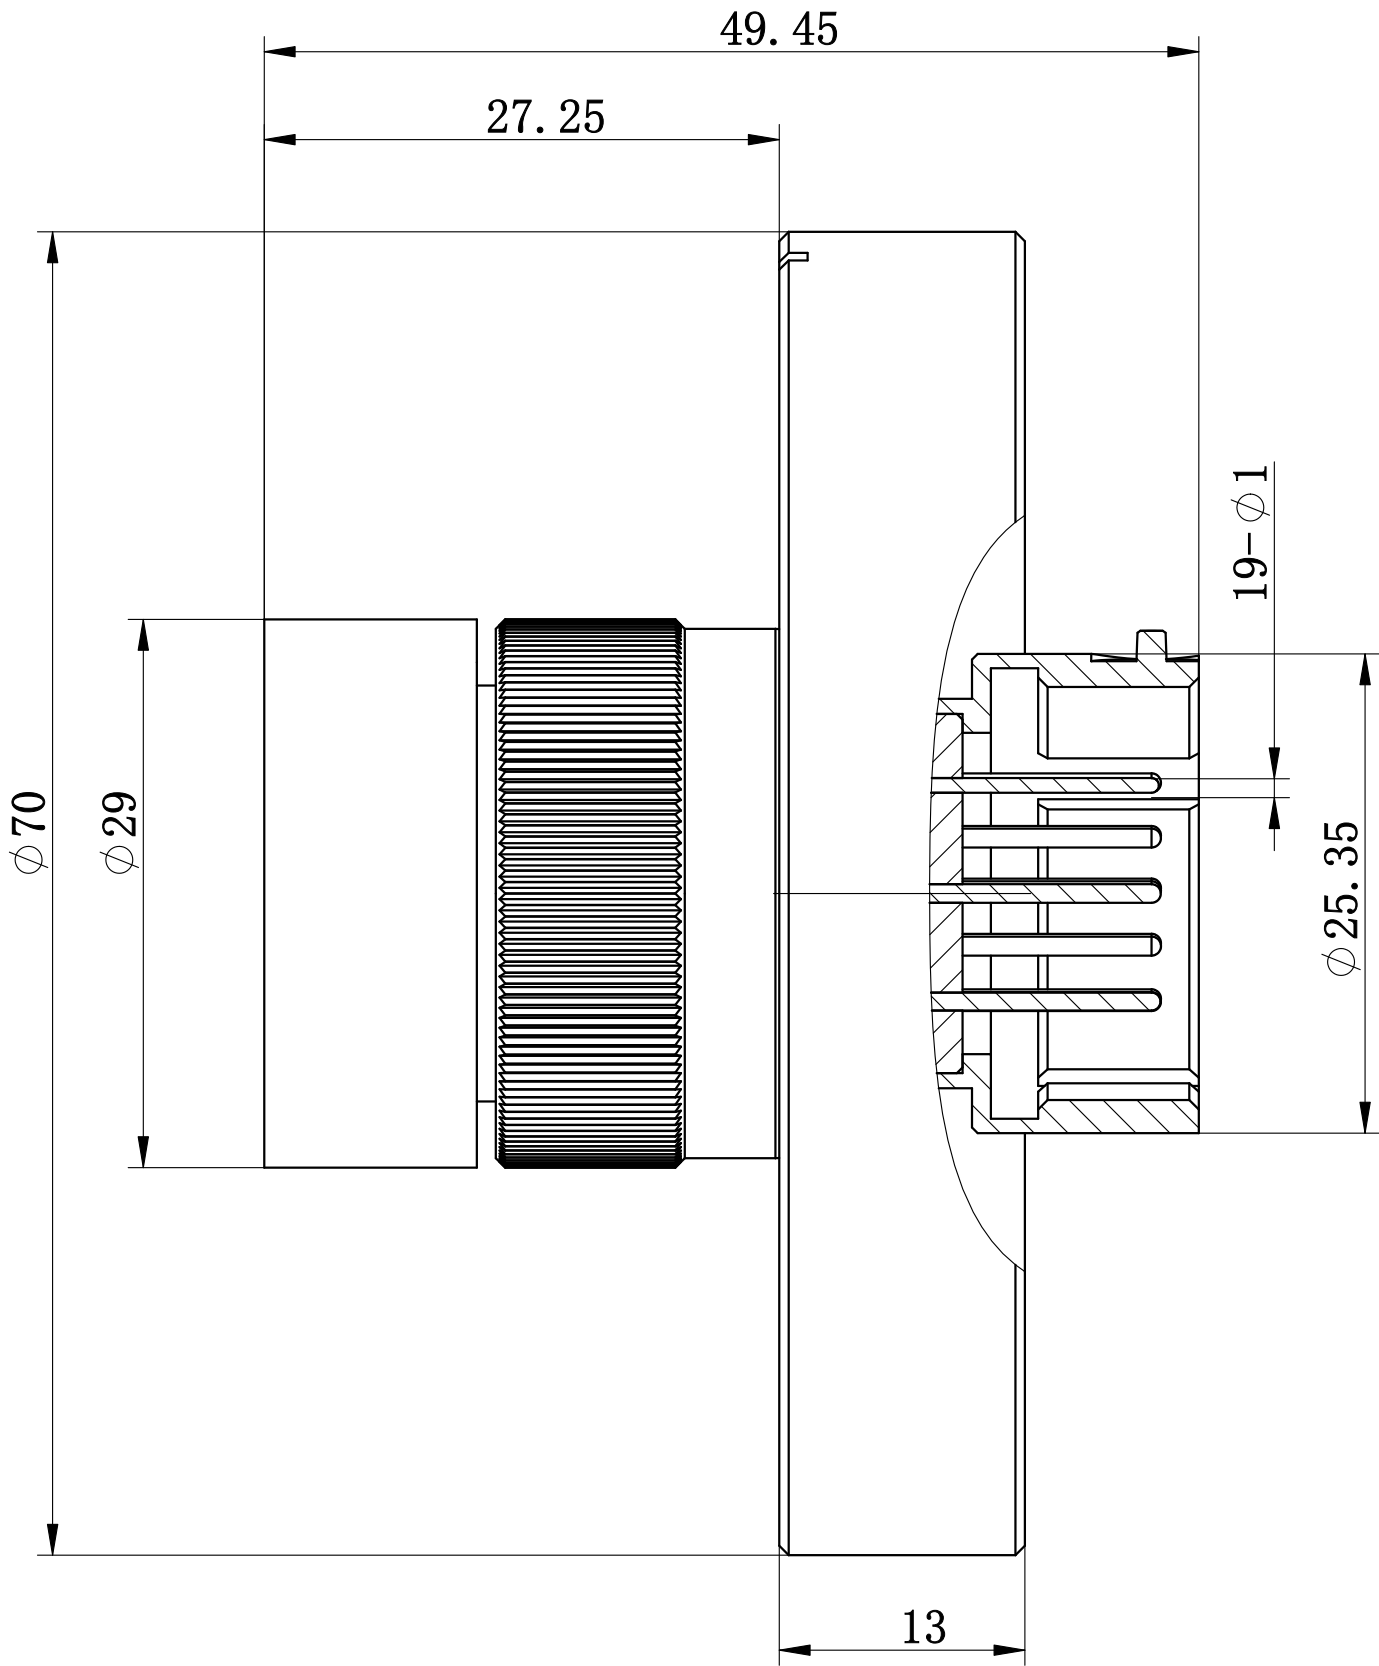

技术参数 Specification

针数 Number of pins	19 Pins
端口标准 Port Standards	GJB 598B-2011 压接针 Crimping Pin
最大电流 Max Current	1.3 A
最大电压 Max Voltage	1.0 KV
绝缘阻抗 Insulation Resistance	$\geq 1 \times 10^9 \Omega$
漏气率 Leakage Rate	$\leq 5 \times 10^{-13} \text{ Pa} \cdot \text{m}^3/\text{s}$
耐温 Temperature Resistance	-271°C~600°C
耐气压 Pressure Tolerance	10 Bar
材料 Material	可伐/不锈钢 Kovar/Steel

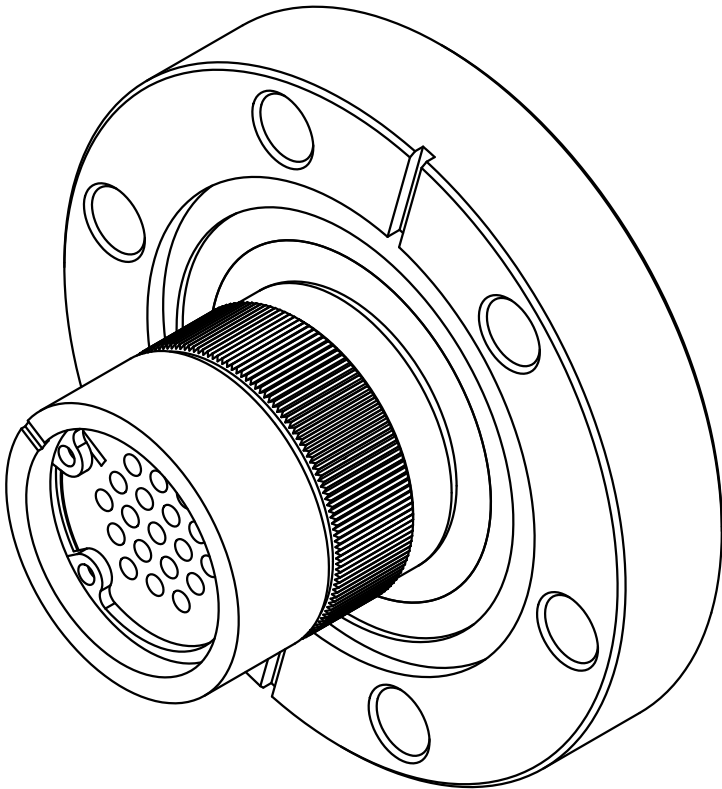

根据中国标准 (GB1804-79)
小数 除非有特殊要求
.X ± 1 单位: mm
.XX ± 0.03 角度:
.XXX ± 0.005 $\pm 0.5^\circ$

According to (GB1804-79)
decimal unless special requirements
.X ± 1 unit: mm
.XX ± 0.03 angel:
.XXX ± 0.005 $\pm 0.5^\circ$

ANDESUN

<http://www.andesun.com>

粗糙度: 1.6/
MACHINED SURFACES:

去毛刺锐边
Remove burrs and sharp edges

安德信科技
ANDESUN Technology
地址:江苏省南京市栖霞区红枫科技园B4栋安德信科技
Add :ANDESUN Technology,Building B4,Hongfeng
Science and Technology Park,Qixia District,
Nanjing City,Jiangsu Province

产品型号
ID:ADS-FT-598-M24-19PIN-CF35