


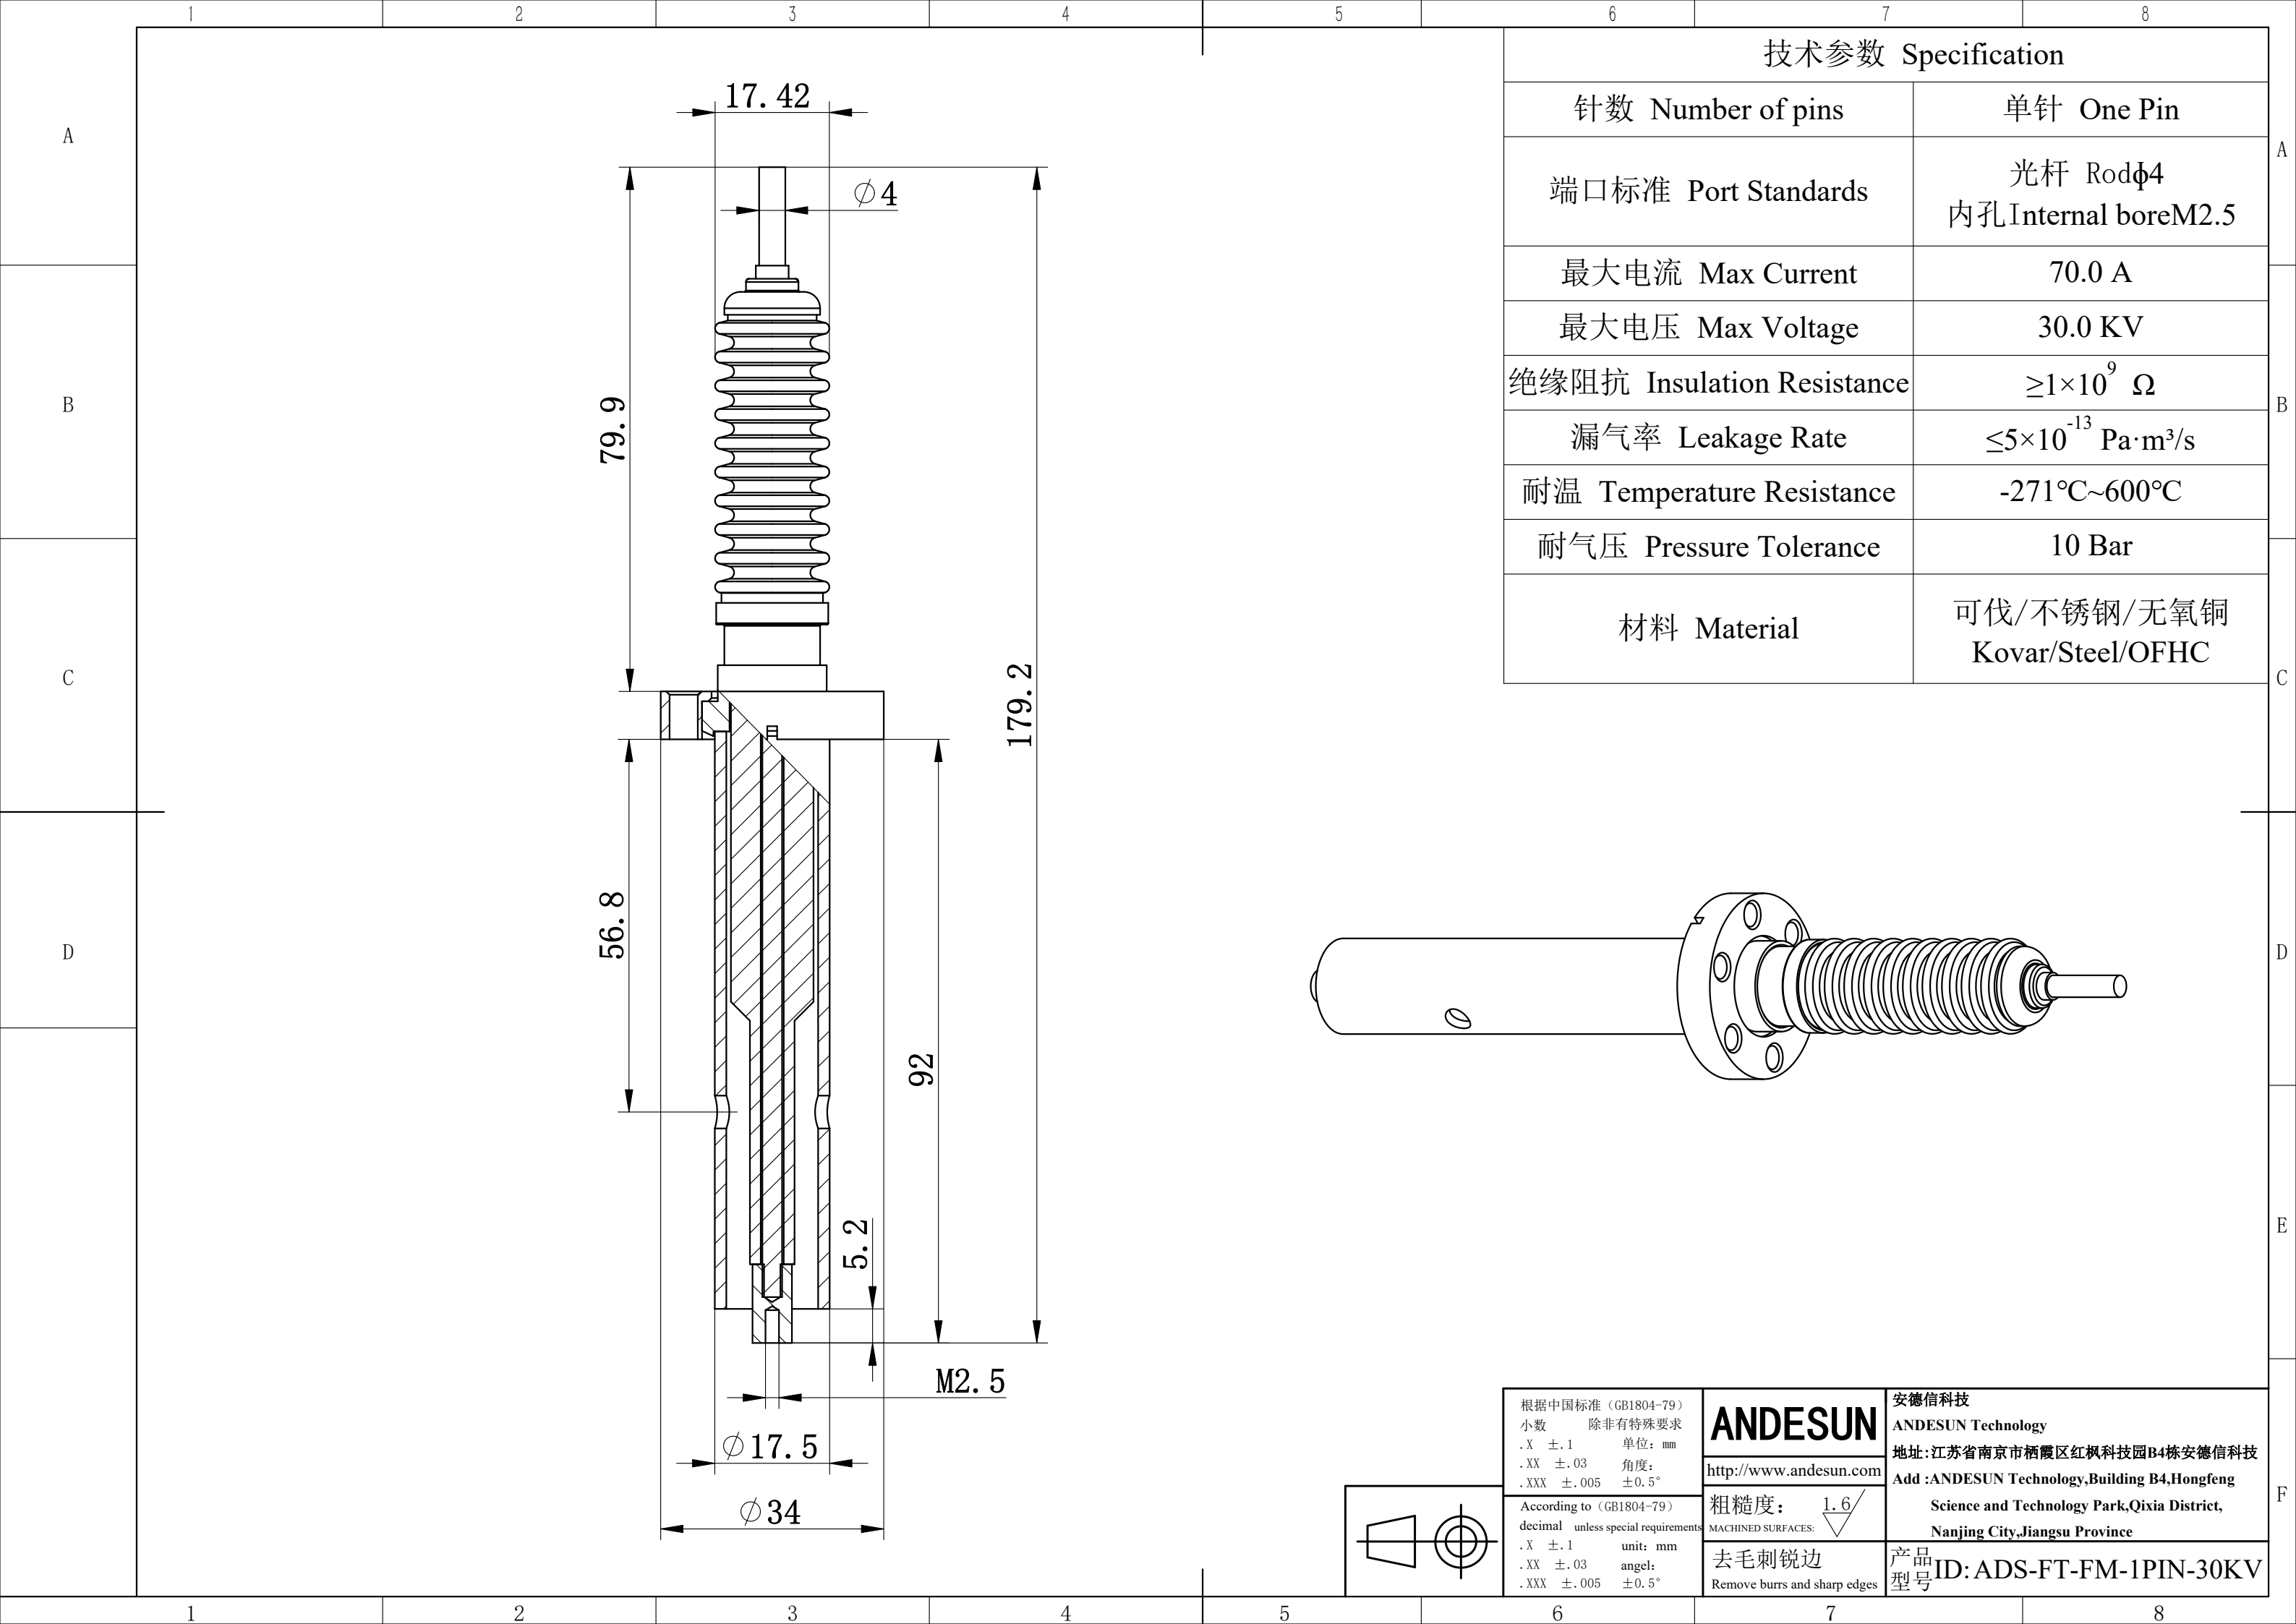

技术参数 Specification	
针数 Number of pins	单针 One Pin
端口标准 Port Standards	光杆 Rod ϕ 4 内孔Internal boreM2.5
最大电流 Max Current	70.0 A
最大电压 Max Voltage	30.0 KV
绝缘阻抗 Insulation Resistance	$\geq 1\times 10^9\ \Omega$
漏气率 Leakage Rate	$\leq 5\times 10^{-13}\ \text{Pa}\cdot\text{m}^3/\text{s}$
耐温 Temperature Resistance	-271℃~600℃
耐气压 Pressure Tolerance	10 Bar
材料 Material	可伐/不锈钢/无氧铜 Kovar/Steel/OFHC

根据中国标准（GB1804-79） 小数 除非有特殊要求 .X $\pm$.1 单位: mm .XX $\pm$.03 角度: .XXX $\pm$.005 $\pm$ 0.5° According to (GB1804-79) decimal unless special requirements .X $\pm$.1 unit: mm .XX $\pm$.03 angel: .XXX $\pm$.005 $\pm$ 0.5°	安德信科技 ANDESUN Technology 地址:江苏省南京市栖霞区红枫科技园B4栋安德信科技 Add :ANDESUN Technology,Building B4,Hongfeng Science and Technology Park,Qixia District, Nanjing City,Jiangsu Province
	粗糙度: 1.6/ MACHINED SURFACES:
	去毛刺锐边 Remove burrs and sharp edges

产品 型号	ID: ADS-FT-FM-1PIN-30KV
----------	-------------------------