


A

B

C

D

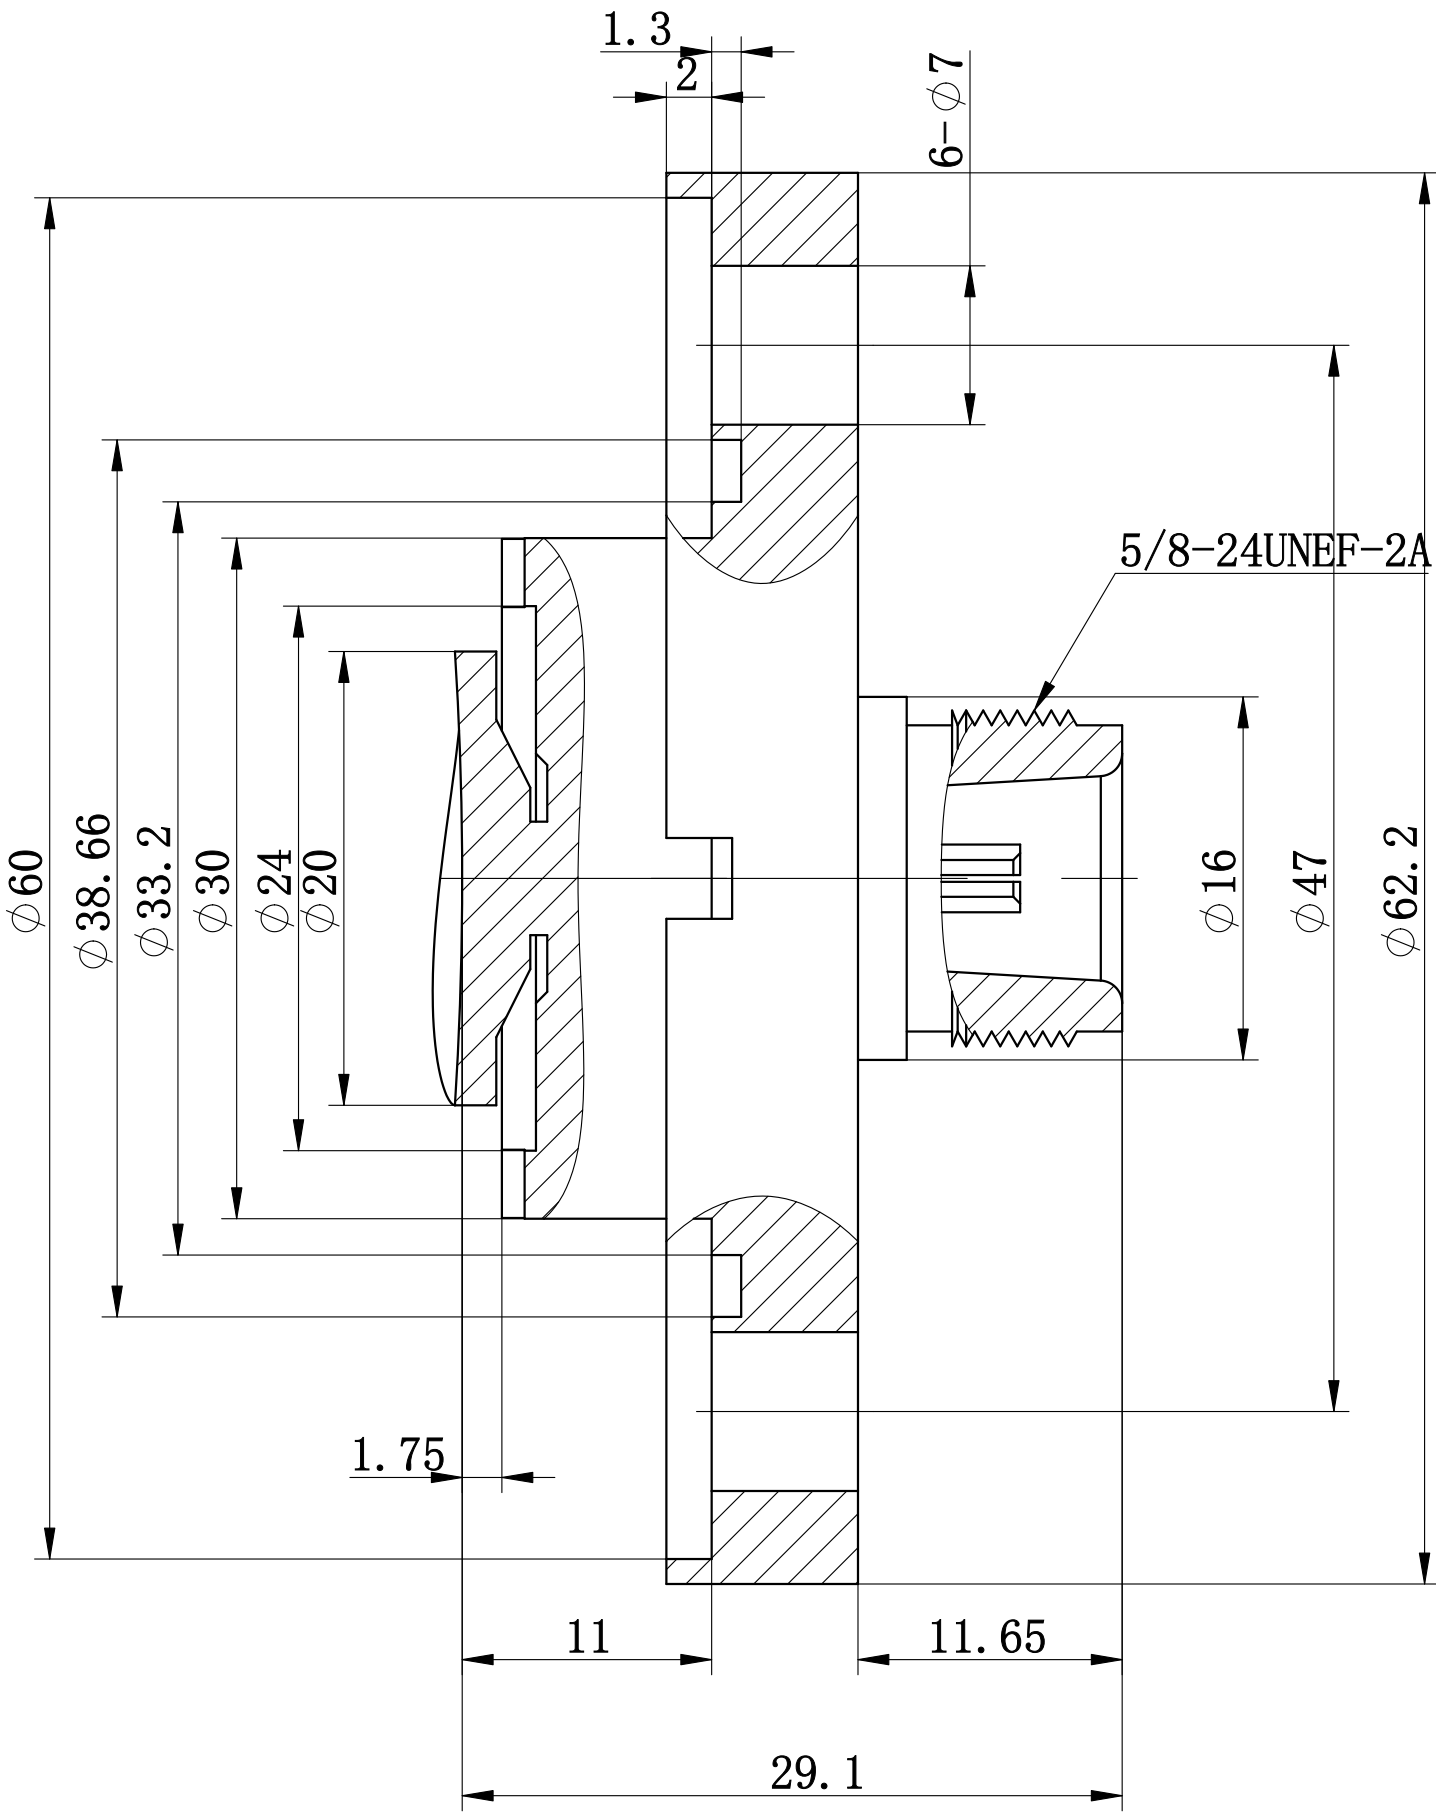

技术参数 Specification

端口标准 Port Standards

N-K
纽扣 Button

最大电流 Max Current

10.0 A

最大电压 Max Voltage

3.0 KV

工作频率 Working Frequency

0~13 GHz

插损 Insertion Loss

≤ 3.0 dB

端口阻抗 Port Impedance

$50 \pm 3 \Omega$

漏气率 Leakage Rate

$\leq 5 \times 10^{-13}$ Pa·m³/s

耐温 Temperature Resistance



-271°C~200°C

耐气压 Pressure Tolerance

10 Bar

材料 Material

可伐/不锈钢
Kovar/Steel

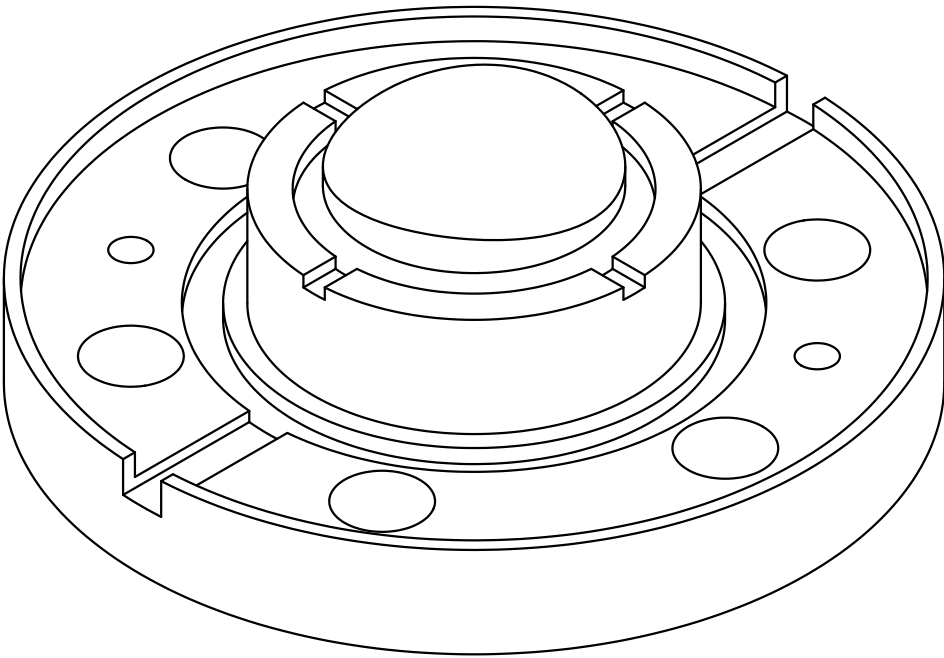

根据中国标准 (GB1804-79)
小数 除非有特殊要求
.X ± 1 单位: mm
.XX ± 0.03 角度:
.XXX ± 0.005 $\pm 0.5^\circ$
According to (GB1804-79)
decimal unless special requirements
.X ± 1 unit: mm
.XX ± 0.03 angel:
.XXX ± 0.005 $\pm 0.5^\circ$

ANDESUN
<http://www.andesun.com>
粗糙度: $1.6/\sqrt{\quad}$
MACHINED SURFACES:
去毛刺锐边
Remove burrs and sharp edges

安德信科技
ANDESUN Technology
地址:江苏省南京市栖霞区红枫科技园B4栋安德信科技
Add :ANDESUN Technology,Building B4,Hongfeng
Science and Technology Park,Qixia District,
Nanjing City,Jiangsu Province
产品型号
ID: ADS-FT-N-BT-002