
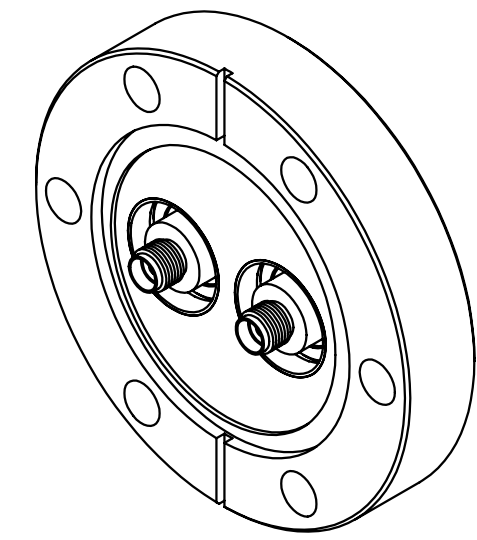
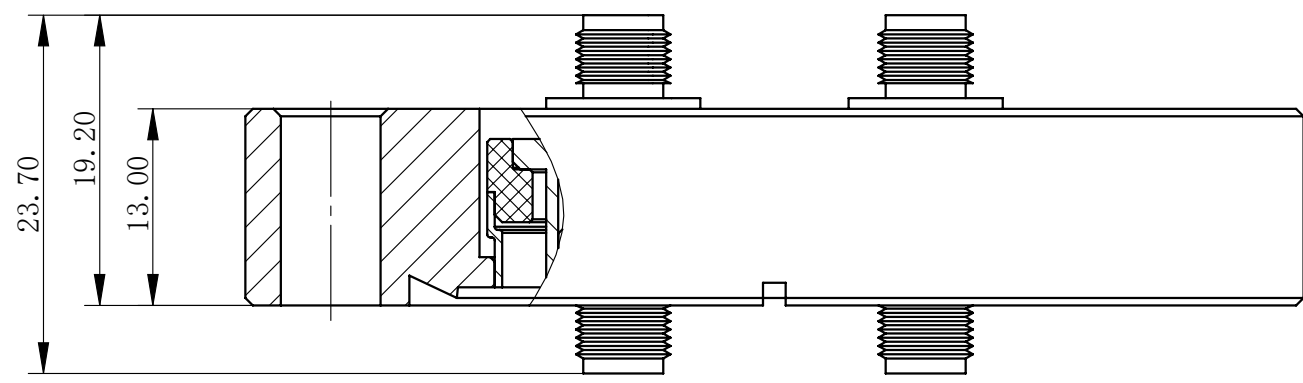


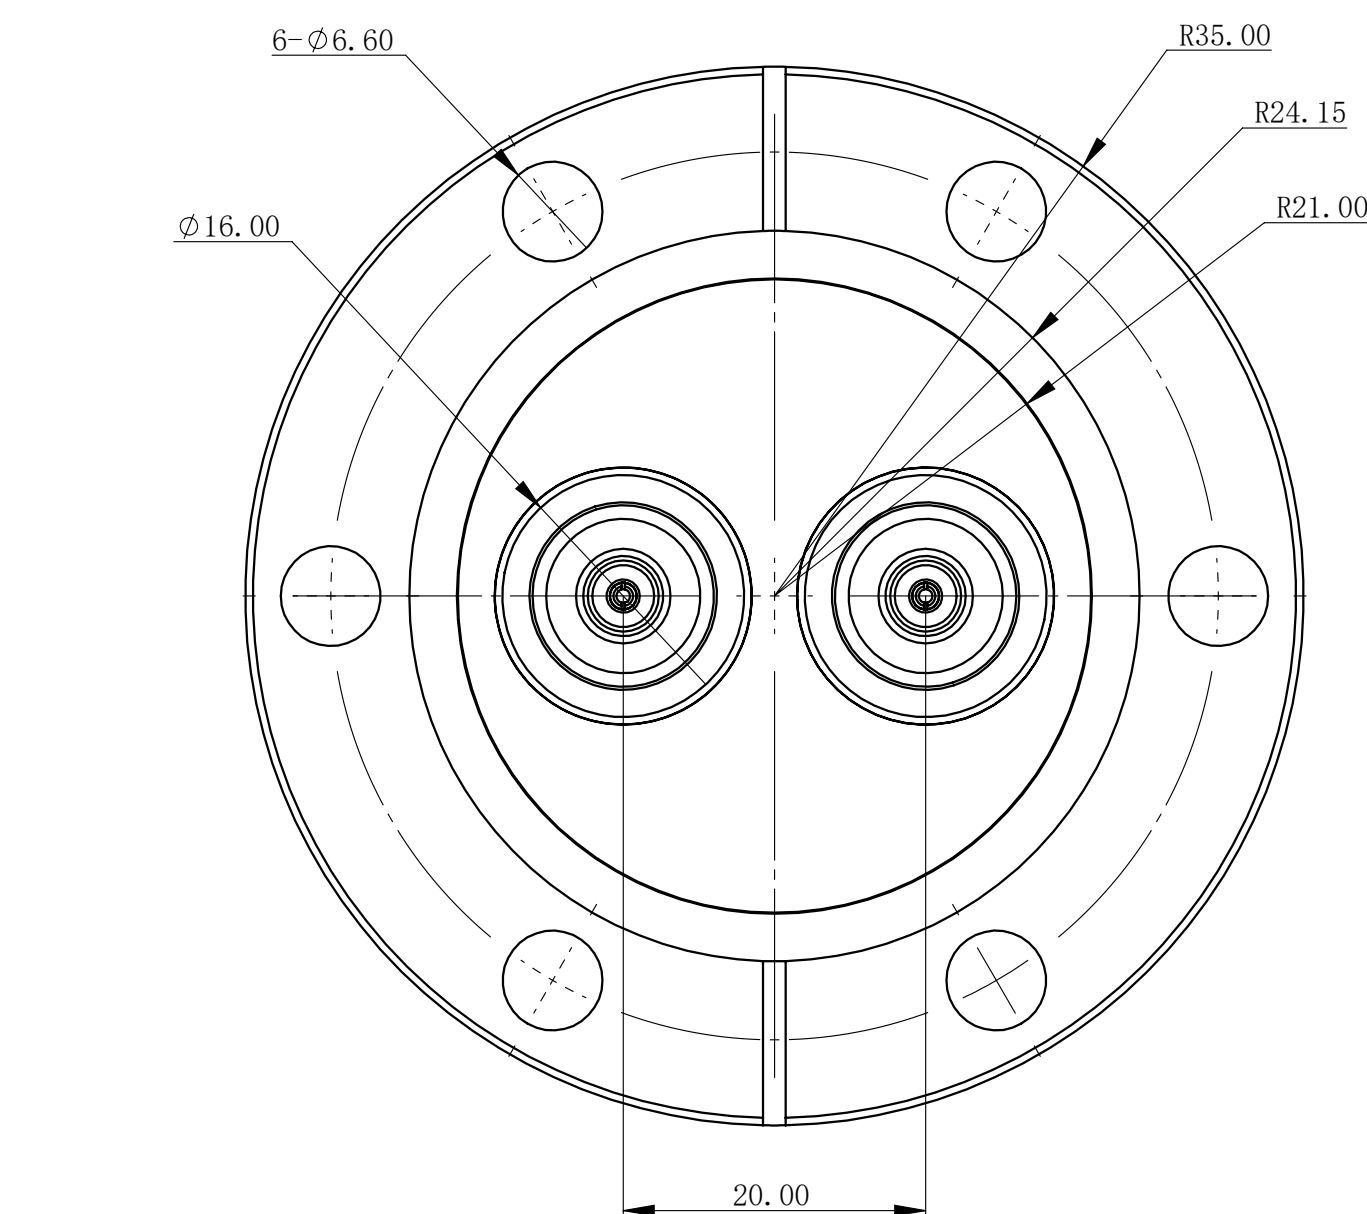

技术参数 Specification	
端口标准 Port Standards	SMA-K SMA-K
最大电流 Max Current	5.0 A
最大电压 Max Voltage	2.5 KV
工作频率 Working Frequency	0~11.5 GHz
插损 Insertion Loss	≤1.2 dB
端口阻抗 Port Impedance	50±3 Ω
漏气率 Leakage Rate	≤5×10 ⁻¹³ Pa·m³/s
耐温 Temperature Resistance	-40℃~300℃
耐气压 Pressure Tolerance	10 Bar
材料 Material	可伐/不锈钢 Kovar/Steel

根据中国标准 (GB1804-79)
小数 除非有特殊要求
.X ±.1 单位: mm
.XX ±.03 角度: ±0.5°
.XXX ±.005

According to (GB1804-79)
decimal unless special requirements
.X ±.1 unit: mm
.XX ±.03 angel: ±0.5°
.XXX ±.005

ANDESUN
<http://www.andesun.com>
粗糙度: 1.6/
MACHINED SURFACES:
去毛刺锐边
Remove burrs and sharp edges

安德信科技
ANDESUN Technology
地址: 江苏省南京市栖霞区红枫科技园B4栋南
京质子源
Add :Nanjing Proten Source,Building B4,Hongfeng
Science and Technology Park,Qixia Districe,
Nanjing City,Jiangsu Province

产品
型号 ADS-FT-DSMA-002-CF25